Verbindungstechnik – LWL
[Network Connectivity – Fiber Optic]

Pigtailset - LC – SC - OM4
[pigtailset – LC – SC – OM4]

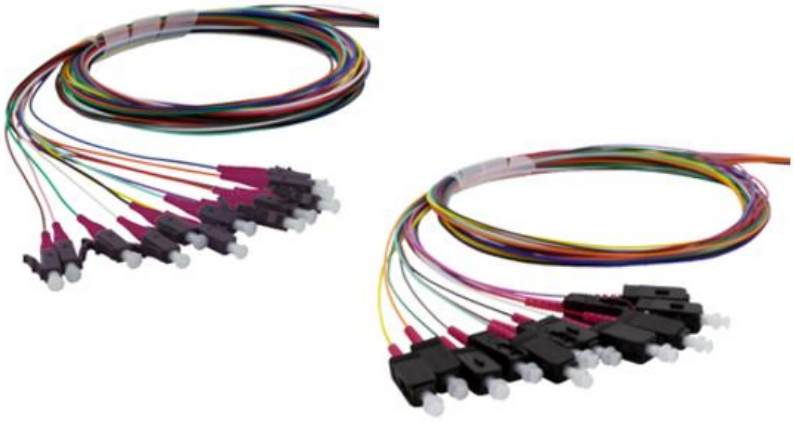

TKM Pigtails sind im 12er Set als Installationszubehör verfügbar und in verschiedenen Qualitätsstufen erhältlich. Die Sets haben folgende Haupteigenschaften:

- Qualitätsstufen: Höchster Standard (HS), Grade B (GB) und Grade C (GC)
- Kompaktader der Pigtails: 0,9mm
- Easy strip: zum leichten Absetzen vor dem Spleißen

[TKM pigtails are available as installation accessories in sets of 12 pieces and are provided in different quality grades. The sets have the following main characteristics:

- *quality types: high standard (HS), Grade B (GB) and Grade C (GC)*
- *pigtails with semi-tight tube 0.9mm*
- *easy strip: for easy strip-off before splicing]*

* Produktfoto exemplarisch
[product picture exemplary]

Technische Daten
[technical data]

Spezifikation Stecker: *[specification connector:]*			
Steckertyp *[types of connector]*	LC/PC		
Qualitätsstufe *[quality type]*	HS – High Standard	GB – Grade B	GC – Grade C
Hersteller / Marke des Steckers *[manufacturer / brand of connector]*	Huber & Suhner *[Huber & Suhner]*	Kein Markenstecker – Grade B *[no brand connector – grade B]*	Kein Markenstecker – Grade C *[no brand connector – grade C]*
Farbe Stecker *[colour connector]*	Schwarz *[black]*	erikaviolett *[heather violet]*	erikaviolett *[heather violet]*
Farbe Knickschutz *[colour boot]*	erikaviolett *[heather violet]*	Weiß *[white]*	Weiß *[white]*
IL@97% [db]: // RL [db]:	≤ 0,25 ≥ 35	≤ 0,25 ≥ 35	≤ 0,50 ≥ 35
IL (typical) [db]: // RL (typical) [db]:	≤ 0,12 ≥ 45	≤ 0,20 ≥ 45	≤ 0,25 ≥ 40
IEC 61300-3-34 / IEC 61300-3-6	**GRADE B/3**	**GRADE B/3**	**GRADE C/3**
			
	*exemplarische Abbildung , Produkt kann farblich abweichen *[exemplary picture, product may vary in colour]*		

*exemplarisch LC Stecker *[exemplarily LC connector]*

1	Steckerkörper *[connector body]*	2	Faser *[fibre]*
3	Staubschutzkappe *[dust cap]*	4	Knickschutz *[boot]*

Steckertyp *[types of connector]*	SC/PC		
Qualitätsstufe *[quality type]*	HS – High Standard	GB – Grade B	GC – Grade C
Hersteller / Marke des Steckers *[manufacturer / brand of connector]*	Huber & Suhner *[Huber & Suhner]*	Kein Markenstecker – Grade B *[no brand connector – grade B]*	Kein Markenstecker – Grade C *[no brand connector – grade C]*
Farbe Stecker *[colour connector]*	beige *[beige]*	erikaviolett *[heather violet]*	erikaviolett *[heather violet]*
Farbe Knickschutz *[colour boot]*	schwarz *[black]*	erikaviolett *[heather violet]*	erikaviolett *[heather violet]*
IL@97% [db]: // RL [db]:	≤ 0,25 ≥ 35	≤ 0,25 ≥ 35	≤ 0,50 ≥ 35
IL (typical) [db]: // RL (typical) [db]:	≤ 0,12 ≥ 45	≤ 0,20 ≥ 45	≤ 0,25 ≥ 40
IEC 61300-3-34 / IEC 61300-3-6	**GRADE B/3**	**GRADE B/3**	**GRADE C/3**
			
	*exemplarische Abbildung , Produkt kann farblich abweichen *[exemplary picture, product may vary in colour]*		

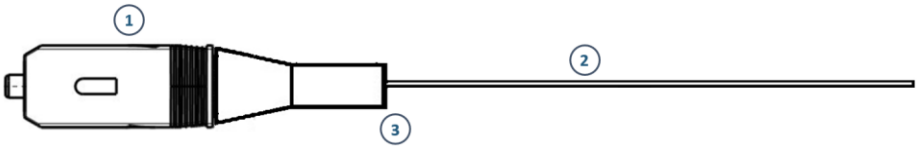

*exemplarisch SC Stecker *[exemplarily SC connector]*

1	Steckerkörper *[connector body]*	2	Faser *[fibre]*
3	Staubschutzkappe *[dust cap]*	4	Knickschutz *[boot]*

Schlossstrasse 123
41238 Moenchengladbach
Germany

Phone: +49 2166 9911-0
FAX: +49 2166 9911-99

Internet.: www.tkm-networks.com
EMail.: info@tkm-gmbh.de

Spezifikation Faser: ***[specification fibre:]***	
Faser ***[fibre]***	1xG50/125 OM4 G.651
Faserdurchmesser ***[fibre diameter]***	0,9mm
Material Coating ***[material of coating]***	LSZH, PVC
Länge Pigtails gesamt ***[length of pigtails absolute]***	2,00m // 2,50m
Farbkodierung Pigtailset ***[colour code of pigtailset]***	gemäß IEC 60304 *[acc. to IEC 60304]*
Farbcodierung ***[colour coding]***	rot, grün, blau, gelb, weiß, grau, braun, violett, türkis, schwarz, orange, rosa *[red, green, blue, yellow, white, grey, brown, violet, turquoise, black, orange, pink]*

Bestellangaben
[ordering information]

Artikelnummer ***[part number]***	**Artikelbeschreibung** ***[part description]***
1700981Z12-020-HS-OM4	Pigtailset – 12x LCsx – OM4 1G50/125 - HS - High Standard – farbcodiert - Länge: 2,00m *[pigtailset – 12x LCsx – OM4 1G50/125 - HS - high standard – colour coded - length: 2.00m]*
1700981Z12-020-GB-OM4	Pigtailset – 12x LCsx – OM4 1G50/125 - GB – Grade B – farbcodiert - Länge: 2,00m *[pigtailset – 12x LCsx – OM4 1G50/125 - GB – grade B – colour coded - length: 2.00m]*
1700981Z12-020-GC-OM4	Pigtailset – 12x LCsx – OM4 1G50/125 - GC – Grade C – farbcodiert - Länge: 2,00m *[pigtailset – 12x LCsx – OM4 1G50/125 - GC – grade C – colour coded - length: 2.00m]*
1700983Z12-020-HS-OM4	Pigtailset – 12x SCsx – OM4 1G50/125 - HS - High Standard – farbcodiert - Länge: 2,00m *[pigtailset – 12x SCsx – OM4 1G50/125 - HS - high standard – colour coded - length: 2.00m]*
1700983Z12-020-GB-OM4	Pigtailset – 12x SCsx – OM4 1G50/125 - GB – Grade B – farbcodiert - Länge: 2,00m *[pigtailset – 12x SCsx – OM4 1G50/125 - GB – grade B – colour coded - length: 2.00m]*
1700983Z12-020-GC-OM4	Pigtailset – 12x SCsx – OM4 1G50/125 - GC – Grade C – farbcodiert - Länge: 2,00m *[pigtailset – 12x SCsx – OM4 1G50/125 - GC – grade C – colour coded - length: 2.00m]*
	Legende: *[legend]* XX – dabei: *[xx – with:* HS – High Standard (Markenstecker) *HS – High Standard (brand connector)* GB – Grade B *GB – Grade B* GC – Grade C *GC – Grade C]*